



LVL Stile

Continuous 3-1/4" lock block extending the full length of the lock-side, keeps the door from bowing and improves security.

Commercial Ball Bearing Hinges *Standard* on All Fiberglass Doors

This stronger, heavy-duty, hinge keeps your door true and square in the opening, and reduces the risk of sagging.



JambGuard™

Heavy duty steel reinforcement plate for added protection and security.

(*Not on sidelite or double units.)




Door Install Screws

Additional 2-3/4" screws come standard with every prehung unit. Install one in the middle and bottom hinge and two in the top hinge for added security.

Premium High Dam Sill

Provides an improved barrier against air and water intrusion.

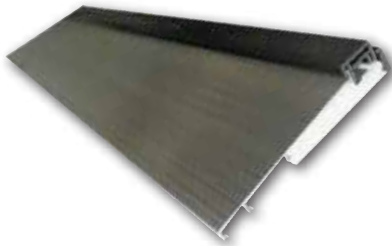

Primed Wood Jambs and Brickmould

Our domestic Ponderosa pine door frames are treated with blue acrylic end sealer to prevent wicking moisture.


High Performance Sweep

Provides a tight seal against drafts.



High Density Polyurethane Foam

Provides 5 times the insulation value of wood doors.



Corner Seal

Added protection against water and air infiltration.

HydroShield™ Technology*

Composite framework seals out moisture and eliminates rot and deterioration.

*Excludes wood edge doors.

